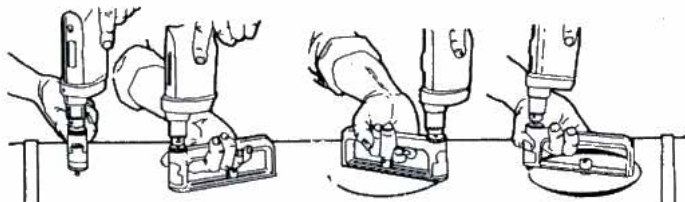


M 50406 Hole Cutter HC1

Item N°.		Ø mm		
HWM50406		51 - 305	450	1

M 52477 Maxi Hole Cutter HC2


Item N°.		Ø mm		
HWM52477		51 - 508	620	1


M 50072/5040 Spare Parts for Hole Cutter HC1 & HC2

Item N°.		
HWM50072	Cutter Bit CB	1
HWM50407	Adjustment Screw HC1B	1
HWM50408	Drive Shaft HC1E	1



HC1 / HC2

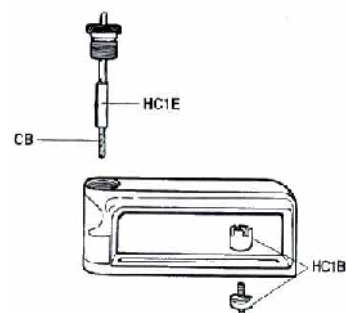
M 52612 Fiberglass Hole Cutter FG1

Item N°.		width mm	width inch	L mm		
HWM52612		228	9 "	200	950	1


M 50607 Hand Seamer S2 and S3

Item N°.		width mm	width inch	L mm		
HWM50607	Type S2 straight	76	3 "	200	680	2
HWM50608	Type S3, Offset, handles	76	3 "	200	680	2

M 50610/52612 Hand Seamer S6 und S9

Item N°.		width mm	width inch	L mm		
HWM50610	Type S6	152	6 "	200	850	1
HWM52612	Type S9	228	9 "	200	950	1

M 50503 Hand Notcher N1

Item N°.		Deep mm		
HWM50503	Cuts 30° V-shaped recess in lech	21	450	4

M 50632 Snap Lock Punch SL1

Item N°.		L mm		
HWM50632	Plier for Snap Lock connections Depth 3/8 ", ca. 9 mm	200	450	4



M 50122/50124 Duct Stretcher DS1 und DS2

Item N°.		L mm		
HWM50122	DS1	405	400	1
HWM50124	DS2, Offset handle	405	400	1

M 52599 Duct Stretcher DS3

Item N°.		L mm		
HWM52599	DS3, Offset handle	305	851	1

M 50565 Profil Punch Lock Stud Crimper PL1

Item N°.		mm		
HWM50565	Light tool to connect C- and CW-Profiles. One hand operation	2 x 0,85	450	1

M 52295/52629 Pipe Crimper C5 und C6

Item N°.		Deep mm	Deep inch		
HWM52295	C5, 5 blades	41	1 5/8"	482	1
HWM52629	C6, 5 blades	41	1 5/8"	454	1

M 52306/52793 Flex Duct Knife

Item N°.		mm		
HWM52306	FDC1, Knife and wire cutter	302	312	1
HWM52793	FDC2, Knife and wire cutter	311	369	1
HWM52929	FDC3, Knife and wire cutter and tighten nylon ties	302	397	1


91545 Roll-Bending Tool Eco-Bender 3

Best. N°.		L mm		
91545 Eco-Bender 3 (with handle)	Technical Data: • Bending height 5 - 200 mm • Galv steel 0.7 mm, stainl. Steel 0.5 mm, Alum. 1.0 mm	300	1,8	1
91545S1	Eco-Bender 3 without handle	300	1,5	1

- So-called **Mini-Brake** to bend up from sheet material
- Made from Aluminium and Stainless Steel, with **mm-graduation**
- Light weighted, ergonomic bending tool with **4 guide rollers**
- Detachable **Eco-Grip Handle**, **3 optimal Grip Positions**
- offers good grip, even when the entire leverage is extended
- Eyelet to hang up to a tool holder


WU 4000/4010 DISC-O-BENDER / Mini DISC-O-BENDER

Best. N°.	For bending sheet metal legs from 90° up to 180° (hem)		
HWWU4000 Disc-O-Bender	Technical Data: • length of the leg: max. 40 mm, min. 8 mm • Bending capacity: max. 0,8 mm • No adjustments	2500	1
HWWU4010 Mini Bender	• as Disc-O-Bender 4000 • length of the leg: max. 23 mm, min. 8 mm	600	1

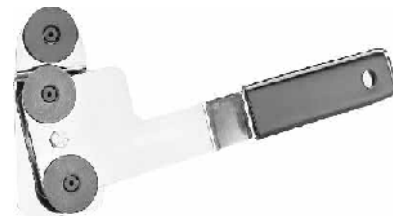

FDC1/ FDC3

FDC2

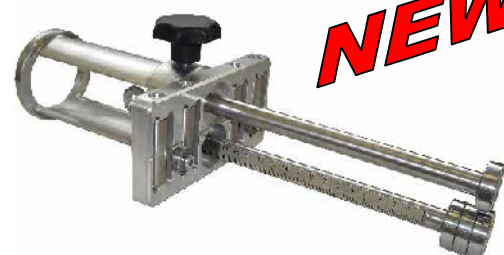
NEW


4000



4010