





CE



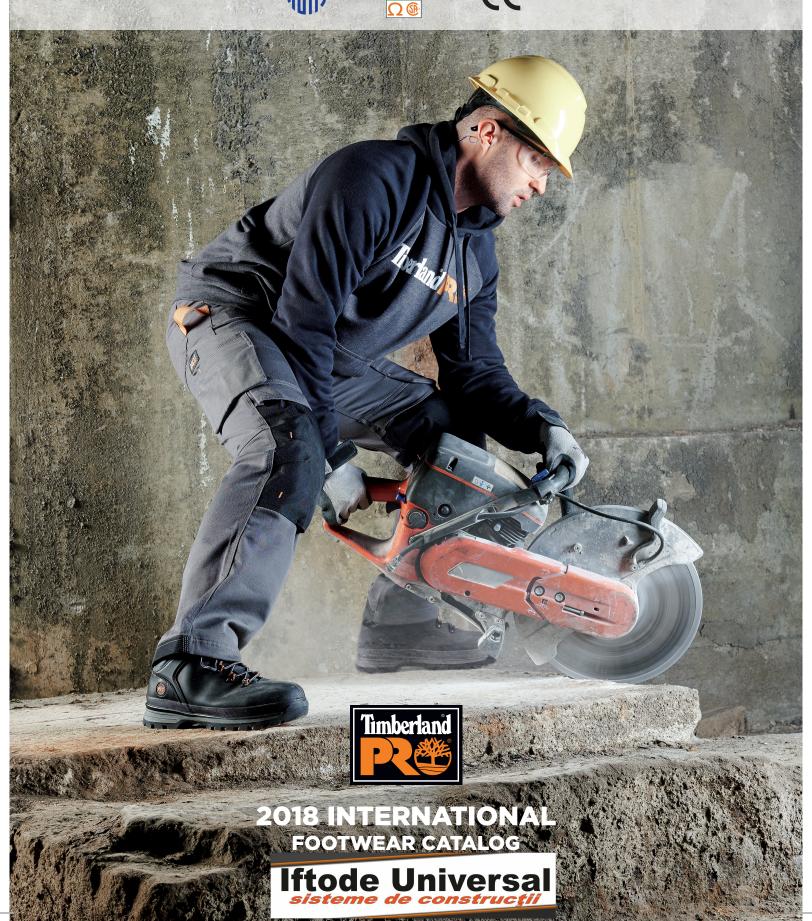

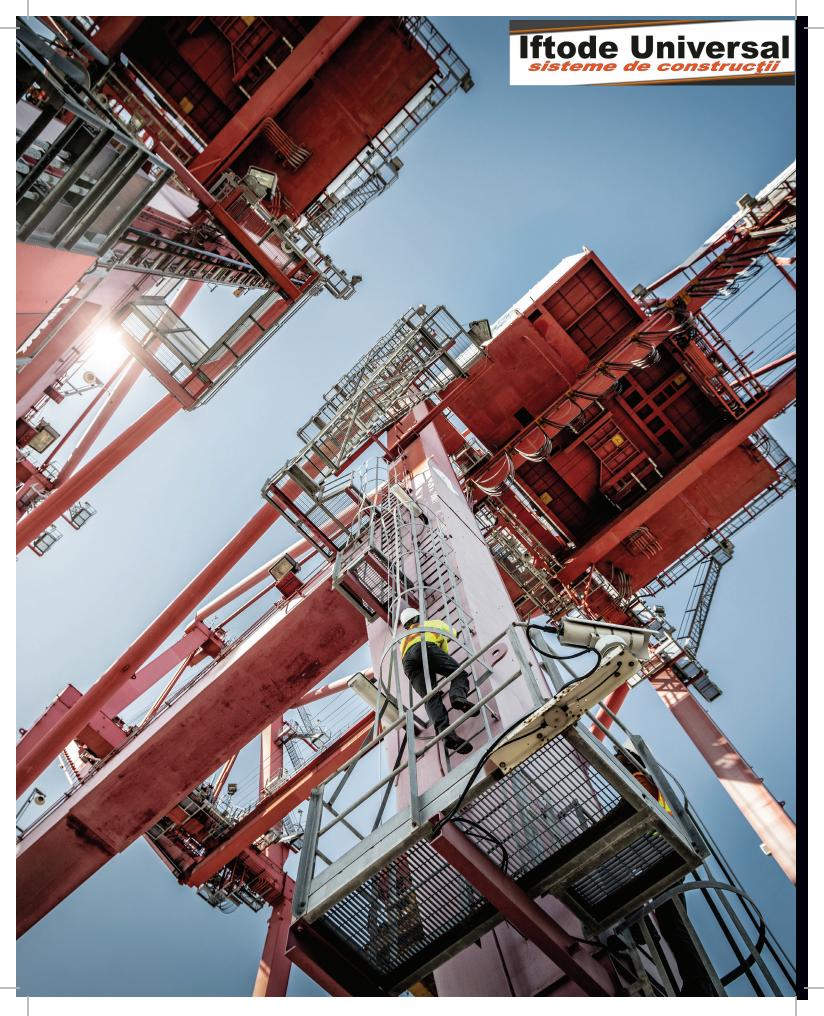


BUILT ON A TRADITION OF CRAFTSMANSHIP AND INNOVATION, THE TIMBERLAND PRO® BRAND **HELPS YOU CONQUER YOUR WORK** DAY. WE KNOW THAT WHAT YOU **WEAR IS AS IMPORTANT AS THE** TOOLS YOU USE. WE ALSO KNOW THAT WHAT'S NEEDED TO GET THE JOB DONE IS ALWAYS CHANGING, SO OUR FOOTWEAR IS ALWAYS **EVOLVING, ENGINEERED WITH** TECHNOLOGIES TO PROVIDE THE **VERY BEST IN COMFORT, DURABILITY** AND PERFORMANCE—ALL DAY LONG.

TABLE OF CONTENTS



TIMELINE OF INNOVATION	6	GLADSTONE	38
HYPERCHARGE	9	BRANSTON	39
RIDGEWORK	11	POWERTRAIN SPORT	41
SPLITROCK XT	12	POWERTRAIN	42
SPLITROCK	14	WILDCARD	44
EURO HIKER 2G	15	RIGMASTER	47
MUDSLINGER	16	BOONDOCK	48
RATCHET	17	CAPROCK	49
KEELE RIDGE	18	MORTAR PULL-ON	50
FLUME	18	EXTERNAL METGUARD	51
BOONDOCK	21	VALOR TACTICAL	53
ENDURANCE HD	23	VALOR DUTY	55
WORKSTEAD	25	WOMEN'S DIRECT ATTACH	59
RESISTOR	26	WOMEN'S HIGHTOWER	60
MORTAR	27	WOMEN'S RIGMASTER	61
MAGNUS	28	WOMEN'S POWERTRAIN	62
TRADITIONAL	29	INSOLES	64
EAGLE	30	TECHNOLOGY KEY	66
WELTED	31	FACTORY DIRECT CALENDAR	68
PIT BOSS	32	SIZING CHART	70
SAWHORSE	33	INDEX	71
DISPLIPTOR	37		

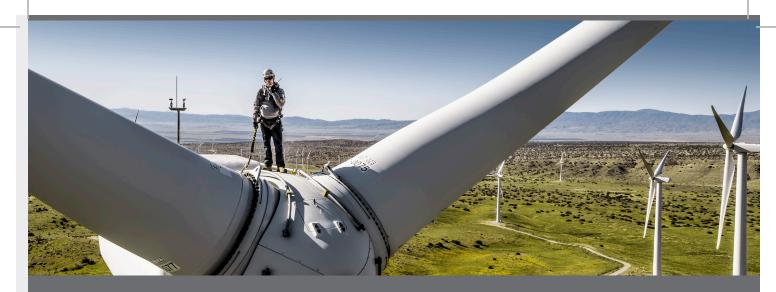

ASTM PROTECTION

Timberland PRO is committed to passing and exceeding ASTM F2413-11 safety standard specifications for performance requirements. Through our relentless testing, and dedication to superior design and construction, we deliver the ultimate comfort, durability and protection expected from a Timberland PRO' product.

CEEN ISO PROTECTION

Timberland PRO offers a wide range of products that meet the minimum safety standards set by the International Organization for Standardization (ISO). The current standard for Safety Footwear across Europe (EN) is EN ISO 20345:2011. Matching this standard, we're committed to designing footwear that helps to minimize injuries and maintain a safer, more productive workplace.



CSA PROTECTION

Timberland PRO builds footwear that meets CAN/CSA-Z195-14 Canadian Safety Association (CSA) standards for toe protection, puncture resistance and resistance to electric shock.







TIMELINE OF INNOVATION THE EVOLUTION OF TIMBERLAND PRO



The Timberland PRO® brand is born



Footwear features traditional work styling and constructions that are recognizably Timberland: traditional Goodyear welt construction in boots like the Pit Boss



The Superlite Series is launched, featuring the Independent Suspension Network™ system



The PowerFit" comfort system is introduced in conjunction with the TiTAN' series



Canada, providing an array of products that meet CSA Grade

1 requirements including puncture resistance



OOO Timberland PRO augments its TiTAN' product family with the Women's TiTA work boot and the introduction. product family with the Women's TiTAN' 6" Cast-Bond™ construction

1999

1999

Timberland PRO's comfort platform, PRO 24/7 Comfort Suspension[™] system, is introduced



First ESD (Electro Static-Dissipative) product, the Gorge Multi-Purpose Outdoor shoe, is brought to market



Timberland PRO introduces Timberland's signature Direct Attach waterproof construction



Timberland PRO launches in Europe, providing footwear,



The TiTAN' 6" boot establishes itself as one of the lightest and most comfortable boots in the market



The PowerWelt product family, featuring Ever-Guard"



TIMBERLAND PRO CUSTOMER SERVICE

PHONE 1-855-253-3261 FAX 1-855-218-9585

HTTP://VENDOR.TIMBERLAND.COM **WEB**

STYLE CODE KEY

TBØ | **A110**Ø | 21Ø

NOTE: SKUs may contain the

TIMBERLAND PRO® SERIES BRAND ADVANTAGE

- Timberland heritage—waterproof, craftsmanship, quality
- A brand name that is highly sought after
- Product designs driven by consumers' on-the-job needs



TIMBERLAND PRO® ISN™ TECHNOLOGY

MAKE THE JOB SITE A LEVEL PLAYING FIELD.





INDEPENDENT SUSPENSION NETWORK™ TECHNOLOGY FROM TIMBERLAND PRO

To navigate rough terrain and stay balanced, you need trustworthy footwear. As you manoeuvre over uneven surfaces, Independent Suspension Network* outsole technology is engineered to help mitigate pressure points and level out your stride.

- · Great for outdoor professionals who spend long days out on job sites walking over uneven terrain.
- · Breakthrough outsole design features pods in the heel and forefoot, which work to improve stability.
- Independent suspension, just like a car: hinged outsole pods allow lugs to bend and grab surfaces for enhanced traction.

HYPERCHARGE























- Slip resistant • Abrasion resistant
- Oil-resistant
- Heat resistant up to 572F using EN/ ISO 20344:2004 (300C)

TIMBERLAND * PRO RUBBER OUTSOLE WITH DUAL-DENSITY EVA MIDSOLE

- Non-marking
- Flat outsole for maximum ground contact and traction

- Premium full-grain leather
- Composite safety toe powered by CarbonShield™ Technology
- Cement construction
- Non-metallic puncture plate
- Mesh lining with antimicrobial treatment
- Contoured shock diffusion plate
- Metal free





TIMBERLAND PRO® STABLE STRIDE™ TECHNOLOGY

STEADY ON YOUR FEET.



STABLE STRIDE™ TECHNOLOGY FROM
TIMBERLAND PRO® is specifically designed
to provide enhanced lateral stability on
slanted and uneven surfaces, reducing
ankle rolling, slippage, and injury. From
steep roofs to rugged job sites, Stable
Stride™ Technology keeps you up and on
your feet.




TIMBERLAND PRO® CARBONSHIELD™ TECHNOLOGY

LIGHT IN WEIGHT. NOT IN PROTECTION.

TIMBERLAND PRO® CARBONSHIELD™

TECHNOLOGY adds strength and subtracts weight with the help of nanotechnology. It provides a better fit, lighter overall weight, and unmatched protection. It's the future of safety and, this Spring, it enhances the strength of our composite safety toe in the new Timberland PRO® Ridgework boot.



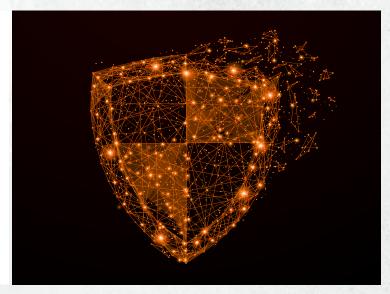

RIDGEWORK






















- Composite safety toe powered by CarbonShield™ technology
- Ever-Guard™ waterproof leather with a waterproof membrane (A1KB0)
- Metal free and mutilation free
- Stable Stride™ technology stability platform
- Anti-Fatigue Technology for shock absorption and energy return
- Mesh lining with antimicrobial treatment for odor control

TIMBERLAND PRO® RUBBER OUTSOLE WITH DUAL-DENSITY EVA MIDSOLE



- · Heat resistant
- · Slip resistant
- · Abrasion resistant
- Oil resistant
- Non marking





SPLITROCK XT















- · Steel safety toe
- Water-resistant premium full-grain and nubuck (A1GH2) leather upper
- Thermoplastic polyurethane ankle overlay
- · Classic hardware and styling
- Steel puncture-resistant plate
- Cement construction
- · Fiberglass shank
- Antimicrobial treated lining for odor control
- Anti-Fatigue Technology for shock absorption and energy return

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE



- Slip resistant
- Oil resistant
- · Non-marking
- · Abrasion-resistant







ALLNEW SPLITROCKXT



SPLITROCK XT

EN ISO 20345:2011

- S3 SRC
- Non-marking sole
- TPU sole









SPLITROCK XT Wheat



SPLITROCK XT Black

SPLITROCK













- · Steel safety toe
- · Water-resistant premium full-grain leather upper
- Padded top collar for comfort
- · Cement construction for flexibility and reduced break-in time
- · Steel puncture-resistant plate
- Antimicrobial treated lining for odor control



- · Slip resistant
- · Oil resistant
- · Non-marking
- · Abrasion-resistant
- · Fuel-resistant









EURO HIKER 2G



- Steel safety toe
- Rugged oiled leather for comfort and durability
- Padded top collar for comfort
- Moisture management lining
- · Steel puncture-resistant plate

TIMBERLAND PRO * RUBBER OUTSOLE



- Slip resistant
- · Non-marking
- · Abrasion-resistant





MUDSLINGER











- · Steel safety toe
- Waterproof full-grain nubuck leather with waterproof membrane
- Abrasion-resistant synthetic toe and heel
- · Cement construction for flexibility and reduced break-in time
- Lightweight molded EVA midsole for athletic performance
- Mesh lining with antimicrobial treatment for odor control
- Nylon and leather ghillie lacing system for lightweight durability and secure fit
- Nylon shank for structural support
- Open-cell polyurethane footbed with antimicrobial treatment for odor control

TIMBERLAND PRO® RUBBER OUTSOLE



- Slip resistant
- · Oil resistant
- · Abrasion resistant



RATCHET











- · Steel safety toe
- Premium nubuck leather
- Non-metallic top hardware with leather ghillie lacing system
- Antimicrobial fabric lining for odor control
- Contoured single-density open-cell polyurethane footbed
- Compression-molded EVA midsole for lightweight cushioning
- Steel shank for added support and durability
- Steel puncture-resistant plate

TIMBERLAND PRO® RUBBER OUTSOLE



- Oil resistant
- · Abrasion resistant
- · Non-marking
- Slip resistant





KEELE RIDGE WORK











- Waterproof leather and mesh upper with waterproof membrane
- · Steel safety toe
- · Cement construction and EVA midsole for flexibility
- · Metallic hardware
- Nylon shank for structural support
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control





TB0**A1Q80**214

STEEL SAFETY TOE WATERPROOFBrown Nubuck Leather

7-12,13,14,15M/W

FLUME MID WORK











- Seam-sealed waterproof leather upper
- · Steel safety toe
- · Cement construction and EVA midsole for flexibility
- · Metallic hardware
- Nylon shank for structural support
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control



TB0**A1Q8V**214

STEEL SAFETY TOE WATERPROOF

Brown Nubuck Leather 7-12,13,14,15M/W


RUBBER OUTSOLE



- · Slip resistant
- · Abrasion resistant
- · Non-marking



- Slip resistant
- Abrasion resistant
- Non-marking

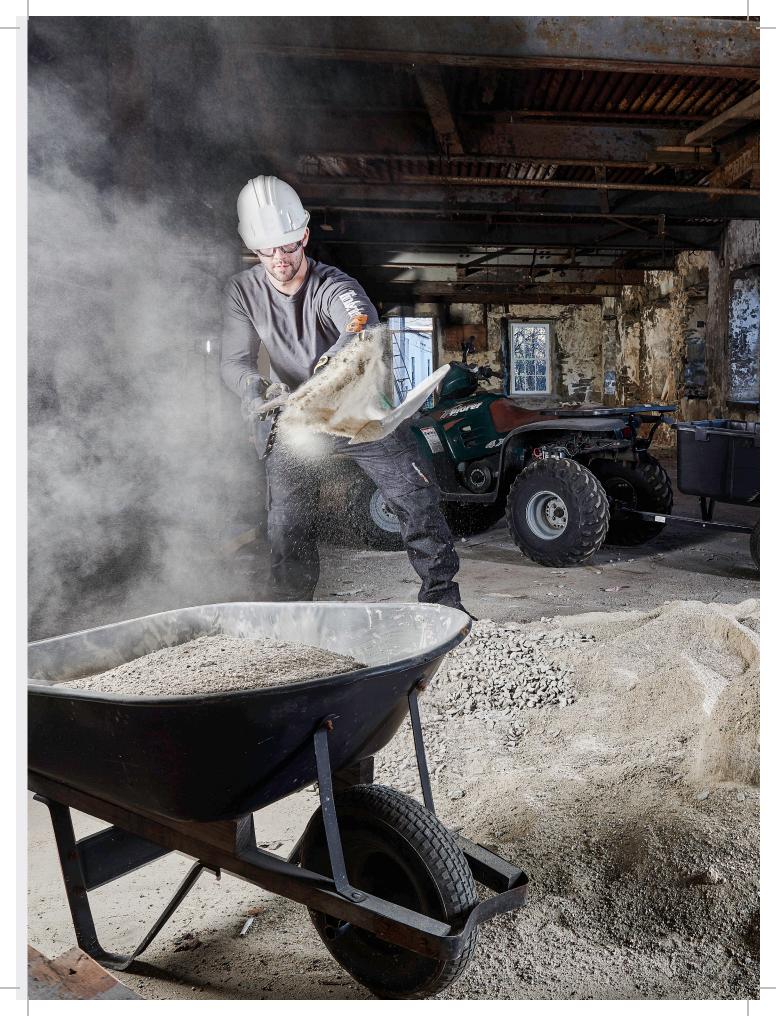

TAKE SHELTER JNSIDE.



THE TIMBERLAND PRO® BOONDOCK WORK BOOT

is equipped with waterproof leather, a waterproof membrane and 60 grams of Thermolite® insulation to keep you warm and dry, no matter how frigid the weather gets.

- A. ANTI-FATIGUE TECHNOLOGY FOOTBED for all-day comfort and energy return
- B. WATERPROOF LEATHER AND BREATHABLE
 MEMBRANE keep your feet dry and comfortable
- C. GOODYEAR WELT/CEMENT HEEL CONSTRUCTION provides stability and forefoot flexibility
- D. TIMBERLAND PRO® THERMOPLASTIC URETHANE
 OUTSOLE maintains flexibility in freezing temperatures
- E. TIMBERLAND PRO® RUBBER TOE PROTECTOR for increased abrasion resistance and durability
- F. COMPOSITE SAFETY TOE shaped on TiTAN® last for non-metallic protection and a roomier fit
- G. PUNCTURE RESISTANT metallic plate minimizes the likelihood of puncture wounds (91631)

BOONDOCK

















- Premium waterproof leather with waterproof membrane
- Molded Timberland PRO® rubber toe protector
- · Composite safety toe
- Combination three-quarter Goodyear welt/cement heel construction
- · Rigid external heel cup for lateral stability
- Fiberglass shank for structural support
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Non-metallic puncture plate (91631)
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE WITH POLYURETHANE MIDSOLE



- · Low temperature formulation maximizes traction on cold surfaces (tested using SATRA TM144:2007 frosted rough ice surface) and extends flexibility in cold environments
- Deep lugs for mud and snow traction
- Slip resistant
- · Abrasion resistant
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours





9 HOURS ON YOUR FEET NEVER FELT SO GOOD.



THE TIMBERLAND PRO® ENDURANCE WORK BOOT

shaped on our exclusive TiTAN® last combines a rubber "double" toe and our exclusive Anti-Fatigue Technology to make a work boot that is the ultimate in protection and comfort.

- A. DUAL-PURPOSE TOP HARDWARE for instant lacing customization
- B. ANTI-FATIGUE TECHNOLOGY for all-day comfort and energy return
- **C. COMPOSITE SAFETY TOE** shaped on TiTAN® last for protection and a superior fit
- **D. RUBBER "DOUBLE TOE"** for increased abrasion resistance and durability
- E. FLEXIBLE NON-METALLIC PUNCTURE-RESISTANT PLATE for underfoot protection
- F. ALL WEATHER TPU rubber outsole

ENDURANCE HD













- · Composite safety toe
- Premium full-grain waterproof leather with waterproof membrane
- · Direct inject construction
- Non-metallic puncture plate
- Mesh lining with antimicrobial treatment
- Fiberglass shank
- Brass eyelets with zinc dual purpose top hooks
- Anti-Fatigue Technology for shock absorption and energy return


ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE WITH POLYURETHANE MIDSOLE



- · Slip resistant
- · Abrasion resistant
- Oil resistant
- Heat resistant up to 248F using EN/ISO 20344:2004 (120C)
- Non-marking





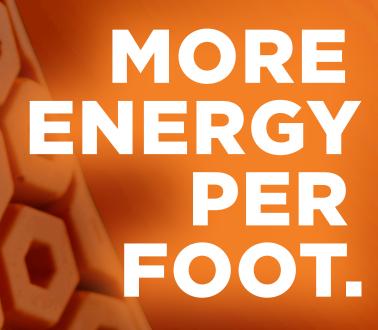

ANTI-FATIGUE TECHNOLOGY COMFORT SYSTEM ABSORBS SHOCK WHILE RETURNING ENERGY BACK TO THE FOOT IN KEY ZONES FOR ALL-DAY COMFORT.

Contoured insole provides maximum support at key pressure points and impact zones.

Cone design results in less material meaning lighter footwear.

Innovative design minimizes impact to maximize support and reduce fatigue.

ANTI-FATIGUE TECHNOLOGY,

WORKSTEAD















A1GBE A1GBP

- · Steel safety toe
- · Premium waterproof leather
- · Steel puncture-resistant plate
- Brass eyelets with zinc dual purpose top hooks
- · Mesh lining with antimicrobial treatment for odor control
- · Cement construction
- Anti-Fatigue Technology for shock absorption and energy return

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE WITH POLYURETHANE MIDSOLE



- Slip resistant
- · Abrasion resistant
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- · Non marking
- Ladder Lock™ Outsole Radius





SRC

TB0A1GDJ001

STEEL SAFETY TOE

Black Full-Grain Leather US: 7-12,13,14,15M EU: 39-49

UK: 6-11,12,13,14M





SRC

TB0A1GE6231

STEEL SAFETY TOE

Wheat Nubuck Leather US: 7-12,13,14M EU: 39-49

UK: 6-11,12,13,14M



SRC



STEEL SAFETY TOE

Black Full-Grain Leather US: 7-12,13,14M EU: 39-49 UK: 6-11,12,13,14M





TB0**A1GBP**214

STEEL SAFETY TOE

Brown Full-Grain Leather US: 7-12,13,14M EU: 39-49 UK: 6-11,12,13,14M

RESISTOR















- Seam-sealed waterproof leather upper
- · Composite safety toe
- Direct-inject construction for durability
- Padded top collar for comfort
- Mesh lining with antimicrobial treatment for odor control
- Non-metallic puncture-resistant plate
- Fiberglass shank
- Anti-Fatigue Technology for shock absorption and energy return

TIMBERLAND PRO' THERMAL PLASTIC URETHANE OUTSOLE



- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A 7 Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- · Abrasion resistant



MORTAR
























- Premium leather upper
- · Direct inject construction
- · Antimicrobial treated lining for odor control
- Steel puncture-resistant plate (A1HLK)
- Non-metallic puncture-resistant plate (A1HJZ)
- · Fiberglass shank
- Anti-Fatigue Technology for shock absorption and energy return

- Low temperature formulation maximizes traction on cold surfaces
- Slip resistant
- · Abrasion resistant
- Oil-resistant per SATRA TM63
- Heat resistant up to 240 F using EN/ISO 20344:20034 (120C)
- Non-marking



MAGNUS













- Premium full-grain leather
- Steel safety toe
- Goodyear Welt Cast-Bond™ construction for durability
- Fabric lining with antimicrobial treatment for odor control
- Steel shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

DUAL-DENSITY POLYURETHANE OUTSOLE



- · Aggressive tread design with slip-resistant properties
- Oil resistant
- · Abrasion resistant
- Lightweight, yet rugged with exceptional cushioning
- Features Ladder Lock[™] outsole radius



TRADITIONAL













- · Composite safety toe
- Premium water-resistant nubuck leather
- Moisture management lining
- Textile anti-perforated midsole
- Non-metallic puncture-resistant plate



- · Slip resistant
- Abrasion resistant
- Non-marking
- Oil resistant
- Hot Contact



EAGLE















- · Steel safety toe
- Water-resistant premium nubuck leather upper
- Padded top collar for comfort
- Cement construction for flexibility and reduced break-in time
- Steel puncture-resistant plate

- Low profile for high surface contact
- Slip resistant
- Oil resistant
- Abrasion resistant



WELTED













- · Composite safety toe
- · Premium water-resistant nubuck leather
- Welt construction
- · Padded top collar
- Moisture management lining
- Non-metallic puncture-resistant plate



- Low profile for high surface contact
- Slip resistant
- Oil resistant
- · Abrasion resistant
- · Non-marking
- Hot Contact



PIT BOSS











- · Steel safety toe
- Rugged nubuck leather for comfort and durability
- Goodyear welt construction for a durable mechanical bond
- Padded top collar for comfort
- Polyurethane midsole for durable comfort
- Fabric lining with antimicrobial treatment for odor control
- Cast metal top hooks for increased durability
- Nylon shock-diffusion plate for support and torsional rigidity
- Open-cell polyurethane footbed with antimicrobial treatment for odor control

TIMBERLAND PRO® RUBBER OUTSOLE



- Slip resistant
- · Oil resistant
- · Abrasion resistant



SAWHORSE















- Steel safety toe (A1B6J, A1B6M, A1B6R)
- Composite safety toe (A1GQ4)
- Seam-sealed waterproof leather upper (A1GQ4)
- Steel puncture-resistant plate (A1B6J, A1B6M, A1B6R)
- Non-metallic puncture-resistant plate (A1GQ4)
- Padded collar for comfortable ankle fit
- Non-metallic shank
- Mesh lining for added breathability and comfort
- Slip-resistant wide tread lug outsole

TIMBERLAND PRO® POLYURETHANE OUTSOLE



- · Slip resistant
- · Non-marking
- · Abrasion-resistant









SAWHORSE











- Premium full-grain and nubuck
- · Steel safety toe
- Steel puncture-resistant plate
- Padded collar for comfortable ankle fit
- · Non-metallic shank
- Mesh lining for added breathability and comfort
- Slip-resistant wide tread lug outsole

TIMBERLAND PRO ® POLYURETHANE OUTSOLE



- Slip resistant
- · Non-marking
- · Abrasion-resistant









TIMBERLAND PRO® DISRUPTOR

WORK YOUR WAY THROUGH THE DAY.







- Upper made from recycled canvas or nubuck leather
- . Steel safety toe for protection, including a protective rubber toe overlay available on some styles
- Timberland PRO* dual-density polyurethane outsole for rubber-like grip
- Bio Suspension System that offers three-part advantage of stability, cushioning, and flexibility
- Anti-Fatigue Technology absorbs shock and returns energy at key zones of the foot
- Electrical Shock Protection (EH) from open circuits or Electro Static Dissipative Protection (ESD/SD+) from static build-up or discharge

DEFENDER REPELLENT SYSTEMS® TREATMENT POWERED BY SCOTCHGARD™ PROTECTOR

YOU'RE UP FOR ANYTHING AFTER WORK, YOUR SHOES SHOULD BE TOO.



DEFENDER REPELLENT SYSTEMS® TREATMENT, FEATURING SCOTCHGARD™ PROTECTOR FROM 3M, WAS ENGINEERED SPECIFICALLY TO ADDRESS THE DYNAMIC ENVIRONMENTAL CONDITIONS SAFETY FOOTWEAR MAY BE SUBJECTED TO.

- Powerful chemistry causes liquids to bead up on the surface for easy cleanup keeping footwear looking good longer
- Triple action formula repels spills, blocks stains, and helps maintain breathability
- Scotchgard™ Protector from 3M uses proprietary C4 based chemistry, which has a very favorable environmental, health and safety profile. They are not made with or degrade to PFOA or PFOS.





DISRUPTOR













- Steel safety toe
- Premium nubuck leather
- Steel puncture-resistant plate
- Defender Repellent Systems® treatment featuring Scotchgard™ protector
- Canvas lining with antimicrobial treatment for odor control
- · Cement construction
- Anti-Fatigue Technology for shock absorption and energy return

DUAL-DENSITY POLYURETHANE OUTSOLE



- "Rubber Like" Grip and Slip Resistance
- Oil resistant per SATRA TM63
- · Abrasion Resistant
- · Non-marking



TB0**A1G9I**231

STEEL SAFETY TOE

Wheat Nubuck Leather US: 5-12,13,14,15M EU: 37-49







TB0**A1G9T**214

STEEL SAFETY TOE

Brown Nubuck Leather US: 5-12,13,14,15M EU: 37-49



GLADSTONE













- · Premium full-grain leather
- Steel safety toe
- · Cement construction for flexibility
- Fiberglass shank for structural support
- Mutilation-free upper
- Goodyear® SafeGrip™ slip-resistant rubber sole for enhanced traction
- Anti-Fatigue Technology for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

GOODYEAR® RUBBER OUTSOLE WITH PU MIDSOLE



- Oil resistant
- · Slip resistant
- · Abrasion resistant
- · Non marking





BRANSTON













- · Alloy safety toe
- Premium oiled nubuck leather for comfort and abrasion resistance
- Non-metallic fiberglass shank for structural support
- Padded top collar for comfort
- Cement construction for flexibility and reduced break-in time
- Antimicrobial treatment for odor control
- Metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

DUAL-DENSITY POLYURETHANE OUTSOLE



- · Slip resistant
- Oil resistant
- · Non-marking
- Abrasion









BULTION GOVERNMENT

TIMBERLAND PRO® POWERTRAIN SPORT SAFETY SHOE

WITH ANTI-FATIGUE TECHNOLOGY



- Ripstop nylon for breathable comfort and durability
- Alloy safety toe for lightweight protection (also available in soft toe)
- Proprietary Timberland PRO* polyurethane outsole with built-in Anti-Fatigue
 Technology to provide shock absorption, energy return, and rubber-like grip
- TPU toe overlay for increased abrasion resistance and durability
- Electrical Shock Protection (EH) from open circuits or Electro Static Dissipative
 Protection (ESD/SD+) from static build-up or discharge



POWERTRAIN SPORT











- Synthetic textile for breathable comfort and durability
- · Alloy safety toe
- Cement construction for flexibility and reduced break-in time
- Mesh lining with antimicrobial treatment for odor control
- Anti-Fatigue Technology for shock absorption and energy return

TIMBERLAND PRO® POLYURETHANE OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Molded inverted cone Anti-Fatigue Technology provides support, cushioning and energy return
- Slip resistant
- Oil resistant
- · Abrasion resistant







TB0**A1GTK**001 ALLOY SAFETY TOE SD+

Blue Ripstop Nylon with Yellow



POWERTRAIN













- Synthetic textile for breathable comfort and durability
- · Alloy safety toe
- · Cement construction for flexibility and reduced break-in time
- Mesh lining with antimicrobial treatment for odor control and comfortable feet
- Anti-fatigue technology for shock absorption and energy return



TB0**A11QF**001

ALLOY SAFETY TOE ESD

Black Synthetic 7-12,13,14,15M/W

TIMBERLAND PRO® POLYURETHANE OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Molded inverted cone Anti-Fatigue Technology provides support, cushioning and energy return
- · Slip resistant
- · Abrasion resistant

POWERTRAIN









- · Steel safetly toe
- Premium synthetic with ripstop nylon
- Steel puncture-resistant plate
- · Cement construction
- Mesh lining with antimicrobial treatment for odor control and comfortable feet
- Anti-Fatigue Technology for shock absorption and energy return
- · Fiberglass shank



S1P SRC

TB0**A1H2Q**001

STEEL SAFETY TOE

Black Synthetic with Ripstop Nylon US: 7-12,13,14,15M


EU: 39-49



TIMBERLAND PRO® POLYURETHANE OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Molded inverted cone Anti-Fatigue Technology provides support, cushioning and energy return
- · Fuel and oil resistant
- Slip resistant
- · Abrasion resistant

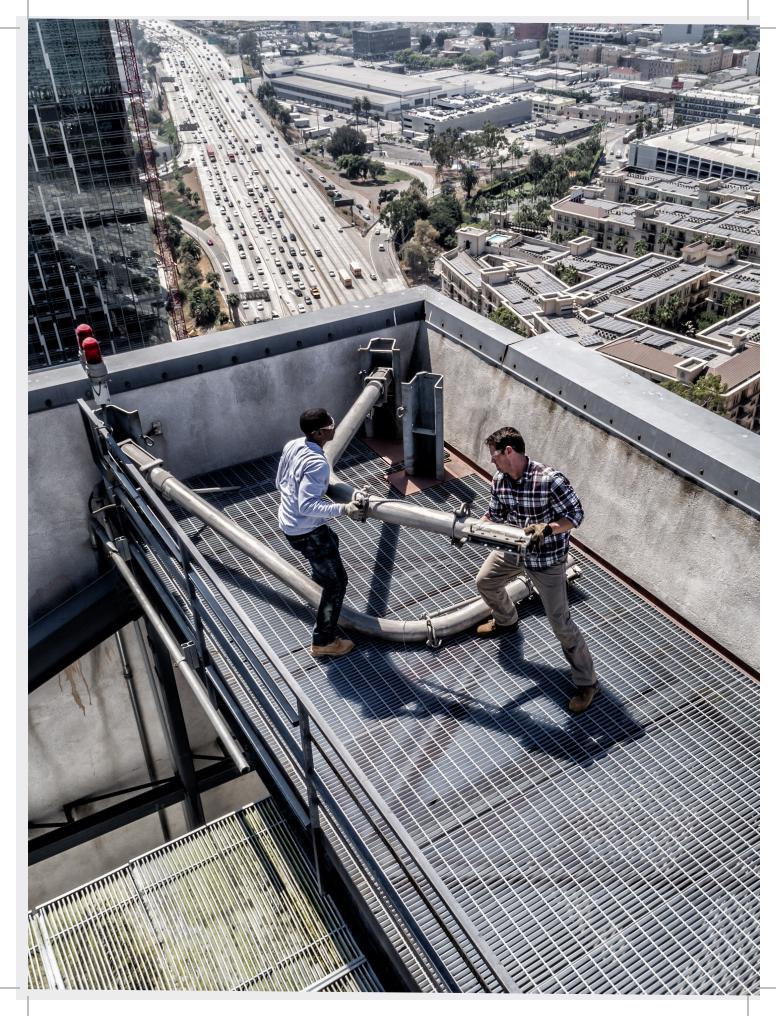

WILDCARD









- · Composite safety toe
- Premium synthetic upper
- · Thermoplastic shank
- Padded top collar for comfort
- · Antimicrobial treatment for odor control
- · Non-metallic puncture-resistant plate

VIBRAM® RUBBER OUTSOLE



- Slip resistant
- · Oil resistant per SATRA TM63
- Heat Resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- · Abrasion resistant
- Non Marking





WILDCARD




- Abrasion-resistant synthetic toe
- · Padded top collar
- · Cement construction
- · Composite safety toe
- Non-metallic puncture-resistant plate

VIBRAM® RUBBER OUTSOLE



- Slip resistant
- Oil resistant
- Non-marking



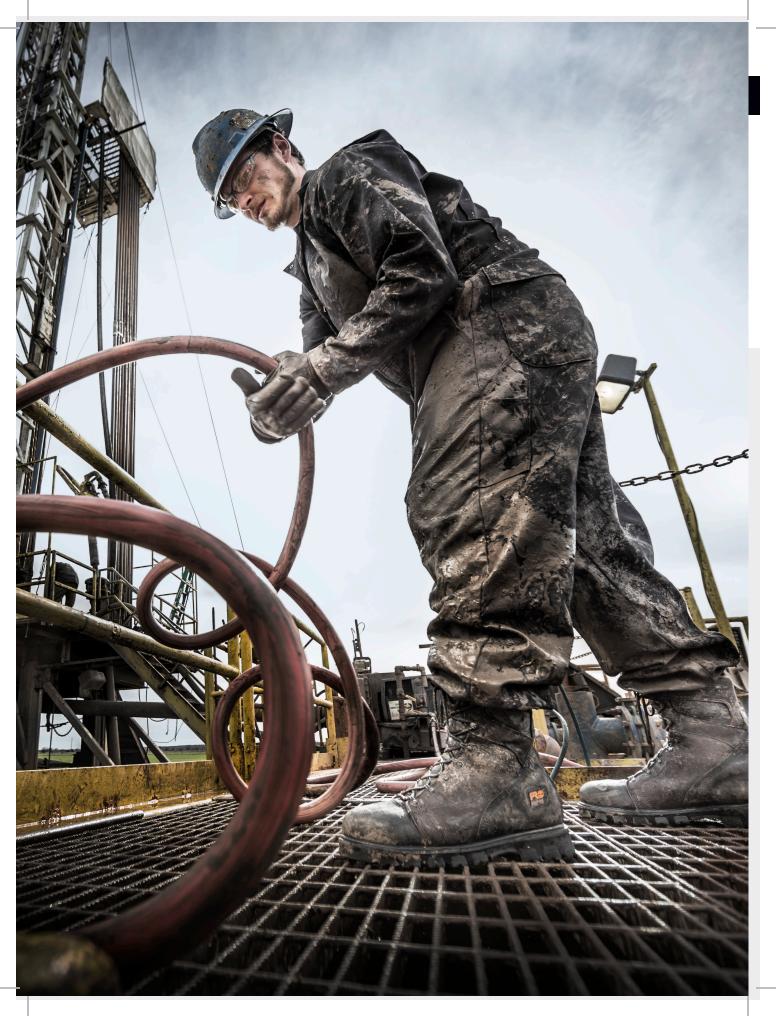

RIGMASTER















- · Steel safety toe
- Premium waterproof leather and abrasion-resistant Ever-Guard™ leather with waterproof membrane
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Anti-Fatigue Technology for shock absorption and energy return
- Unique "fingergrip" pull-on feature for ease of entry
- Padded top collar for comfort
- · Mesh lining with antimicrobial treatment for odor control
- Steel shank for structural support

DUAL-DENSITY POLYURETHANE OUTSOLE



- · Lightweight, yet rugged with exceptional cushioning
- · Aggressive tread design, featuring triangular lock lugs that provide maximum traction
- Oil resistant
- · Abrasion resistant
- Features Ladder Lock™ outsole radius



BOONDOCK














- Premium waterproof leather with waterproof membrane
- Molded Timberland PRO* rubber toe protector
- · Composite safety toe
- Combination three-quarter Goodyear welt/cement heel construction
- Rigid external heel cup for lateral stability
- Fiberglass shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

VIBRAM® FIRE&ICE™ RUBBER OUTSOLE



- Low temperature formulation maximizes traction on cold surfaces
- Deep lugs for mud and snow traction
- Abrasion resistant
- · Non-marking
- · Oil resistant
- · Slip resistant

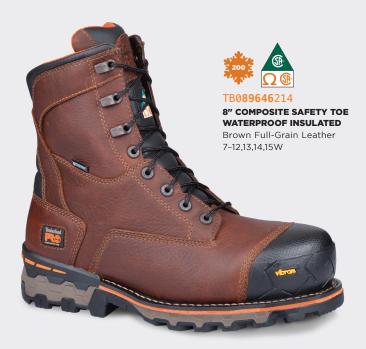

CAPROCK















- Alloy safety toe
- · Premium waterproof leather
- Ever-Guard™ leather for increased abrasion resistance
- Goodyear Welt Cast-Bond™ construction for a durablility
- · Unlined for breathability
- Unique "fingergrip" pull-on feature for ease of entry (1152A)
- Three-rib steel shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

DUAL-DENSITY PU OUTSOLE



- Heat resistant up to 248°F using EN/ ISO 20344:2004 (120°C)
- · Oil resistant
- Slip resistant
- · Abrasion resistant
- Non marking
- Features Ladder Lock[™] Outsole Radius
- Features Ladder Lock™ outsole radius





MORTAR PULL-ON













- Premium full-grain leather
- · Steel safety toe
- Non-metallic puncture-resistant plate
- Antimicrobial treatment for odor control
- Heavy-duty fiberglass shank for torsional stability and ladder support

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE



- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A 7 Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- · Abrasion resistant



EXTERNAL METGUARD
















- · Steel safety toe
- Premium abrasion-resistant Ever-Guard $^{\scriptscriptstyle\mathsf{TM}}$ leather for extreme durability
- Goodyear Welt construction for a durable mechanical bond
- Leather padded top collar for comfort
- · Fabric lining with antimicrobial treatment for odor control
- · Cast metal top hooks for increased durability
- Steel shank for structural support
- Protective thread includes DuPont™ Kevlar® Aramid fiber on upper and welt for durability and heat resistance
- External, asymmetrical ABS metatarsal guard is hinged for comfortable protection

TIMBERLAND PRO® RUBBER OUTSOLE WITH INTERNAL POLYURETHANE COMFORT ZONES



- · Slip resistant
- · Heat resistant
- · Oil resistant
- · Abrasion resistant
- · Internal polyurethane comfort zones



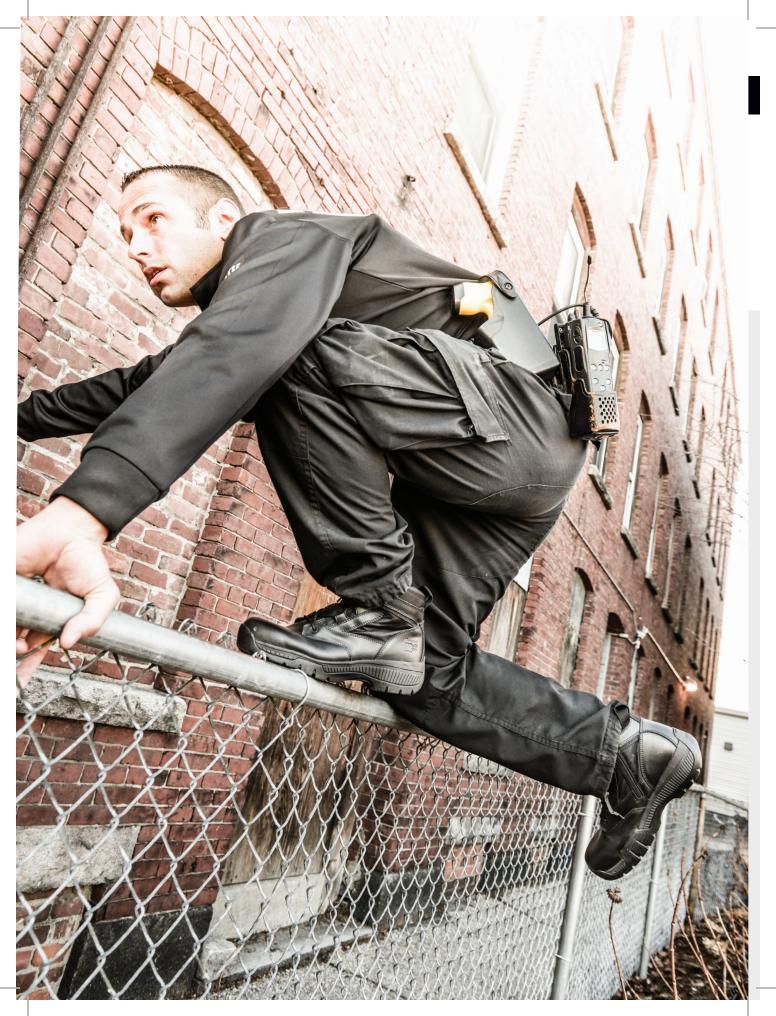

VALOR™ TACTICAL

















- Polishable smooth Raptek microfiber with 800D ballistic nylon
- · Cement construction for flexibility
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control
- Scotchgard[™] protector by 3M for stain resistance
- Anti-Fatigue Technology for shock absorption and energy return

VIBRAM® RUBBER OUTSOLE WITH EVA MIDSOLE



- Heat resistant up to 572°F using EN/ ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking





VALOR™ TACTICAL

















- Cement construction for flexibility and reduced break-in time
- Mesh lining with antimicrobial treatment for odor control and comfortable feet
- · Metal detector friendly hardware
- Polycarbonate hardware for lightweight, non-metallic durability
- Athletic-inspired Vibram® outsole specifically built for traction on variable terrain
- Anti-Fatigue Technology for shock absorption and energy return

VIBRAM® RUBBER OUTSOLE



- · Non-marking
- · Slip resistant
- Oil resistant
- · Abrasion resistant







VALOR™ DUTY













- · Premium black full-grain leather
- Cement construction for flexibility and reduced break-in time
- Polishable smooth forefoot with textile upper panels
- Lightweight molded EVA midsole for athletic performance
- Mesh lining with antimicrobial treatment for odor control
- Scotchgard[™] protector by 3M for stain resistance
- Anti-Fatigue Technology for shock absorption and energy return
- Rounded driving moc heel
- · Prone lugs for stability
- · Wall climb toe grip

TIMBERLAND PRO® RUBBER OUTSOLE



- Non-marking
- Slip resistant
- Oil resistant
- · Abrasion resistant



VALOR™ DUTY

















1165A EXCLUDES EXCLUDES 1162A 1162A





TB0**1165A**001

8" DUTY COMPOSITE SAFETY TOE WATERPROOF SIDE-ZIP

Black Smooth Leather with 1200D Ballistic Nylon 3.5-12,13,14,15M/W





TB01163A001

6" DUTY SOFT TOE WATERPROOF SIDE-ZIP

Black Smooth Leather with 1200D Ballistic Nylon 3.5-12,13,14,15M/W





TB0**1164A**001

6" DUTY SOFT TOE WATERPROOF

Black Smooth Leather with 1200D Ballistic Nylon 3.5-12,13,14,15M/W





TB0**1167A**001

8" DUTY SOFT TOE WATERPROOF SIDE-ZIP

Black Smooth Leather with 1200D Ballistic Nylon 7–12,13,14,15M/W






TB0**1162A**001

6" DUTY SOFT TOE SIDE-ZIP

Black Smooth Leather with 1200D Ballistic Nylon 7-12,13,14,15M/W

FIGHT FATIGUE

DYNAMIC ANTI-FATIGUE TECHNOLOGY

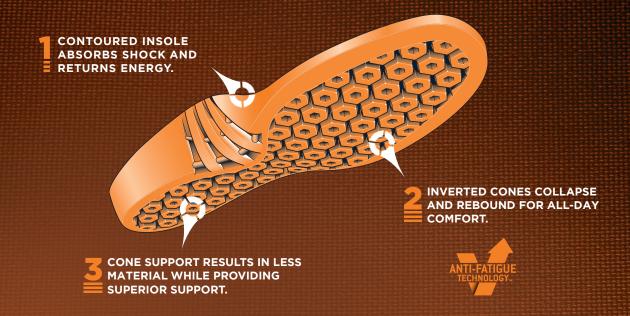

AND

Weathergear

No matter what you do or where you do it, Timberland PRO' VALOR™ boots with the Weathergear Protection System are built to protect you from whatever nature dishes out. Decades of bootmaking know-how and innovative technologies provide the ultimate defense against wind, water, snow, ice, mud, dirt and anything else you may encounter out there. Timberland PRO' VALOR™ boots with the Weathergear Protection System stand for comfort and confidence at work, whatever the weather.



Specially-treated leather and waterproof lining provides added protection from water and moisture.



Protects against external elements while allowing perspiration to escape, maintaining a comfortable, dry boot all day.

FARTH



Tough-wearing leathers, reinforced stitching and shockabsorbing cushioning endure even the roughest terrains and conditions.



SKY

Whether the temperature changes or conditions go from wet to dry, these boots are made to keep you comfortable no matter what environment you find yourself in.



Defender Repellent Systems' coating featuring Scotchgard™ protector were engineered specifically to address the dynamic environmental conditions military footwear may be subjected to while in combat theater.

- Defender Repellent Systems® coating with Scotchgard™ protector are amazingly resistant, lasting up to 6x longer than painted surfaces.
- Protects Boot: Upper; Leather;
 Textiles: and Stitching.
- Repels and prevents absorption of: Water; Kerosene; Diesel Fuel; used Motor Oil; Transmission Fluids; Alcohol; and Car Wash Detergent.

WOMEN'S

SPECIFICALLY DESIGNED TO ACCOMMODATE ALL WIDTHS



THE TIMBERLAND PRO® WOMEN'S FIT

Designed specifically for women, Timberland PRO® women's footwear is built with three distinctive points of comfort, including a more anatomical last with a true-to-fit instep and heel lock, asymmetrical toe shape, and a low profile, resulting in a more feminine aesthetic.



- · Abrasion resistant
- Fuel oil-resistant
- · Heat resistant
- · Non-marking

WOMEN'S DIRECT ATTACH

















- Steel puncture-resistant plate
- Built on a women's last for optimal fit and comfort
- Direct-inject construction
- · Padded top collar
- · Mesh lining with antimicrobial treatment
- · Injected shock-diffusion plate





WOMEN'S HIGHTOWER

























ALL-WEATHER TPU OUTSOLE WITH PU MIDSOLE

- Built on a single-width, anatomical last for a more versatile, optimal fit
- Alloy safety toe (A1KIT, A1KKS)
- Steel safety toe (A1KKH, A1KKP)
- Steel puncture-resistant plate (A1KKH, A1KKP)
- · Cement construction for flexibility
- Anti-Fatigue Technology for shock absorption and energy return
- Fiberglass shank for structural support
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- · Abrasion resistant
- Non-marking









WOMEN'S RIGMASTER




















- · Alloy safety toe
- Premium waterproof leather with waterproof membrane
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Padded top collar for comfort
- Mesh lining with antimicrobial treatment for odor control
- · Cast metal top hooks for increased durability
- Fiberglass shank for structural support
- Anti-Fatigue Technology for shock absorption and energy return

DUAL-DENSITY POLYURETHANE OUTSOLE



- · Lightweight, yet rugged with exceptional cushioning
- Aggressive tread design featuring triangular lock lugs that provide maximum traction
- Oil resistant
- Abrasion resistant
- Features Ladder Lock™ outsole radius



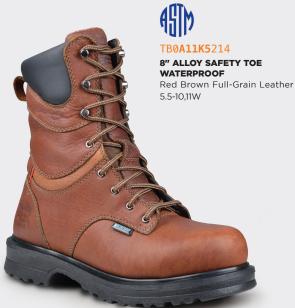

WOMEN'S POWERTRAIN















- Premium synthetic upper and ripstop nylon
- Built on a women's specific last for optimal fit and comfort
- · Alloy safety toe
- Steel puncture-resistant plate (A1H30)
- · Cement construction for flexibility
- Fiberglass shank for structural support
- Proprietary outsole with built-in Anti-Fatigue Technology for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

TIMBERLAND PRO® PU OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- · Abrasion resistant
- Non marking






S1P SRC TB0**A1H30**001

STEEL SAFETY TOE ESD

Black Synthetic with Ripstop Nylon

US: 5.5-11M



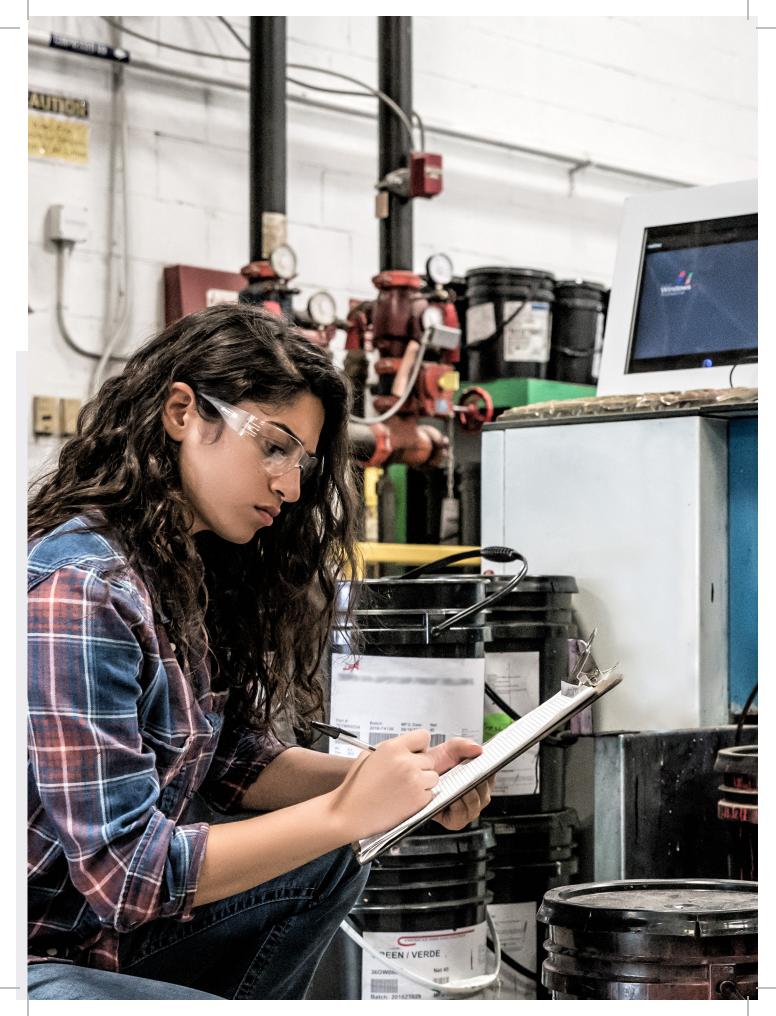

INSOLES

ANTI-FATIGUE TECHNOLOGY ESD FOOTBED







TB0**A10RE**827

ANTI-FATIGUE TECHNOLOGY ESD FOOTBED

XS, S, M, L, XL, XXL

FEATURES

- Durable: resists compression set over time
- · Resilient: recovers for next foot strike
- · Mono-sided inverted Anti-Fatigue Technology cones
- · Contoured bio-mechanically engineered top surface helps maintain proper gait
- · Dynamic arch adapts to different foot shapes for maximum comfort
- · Moisture-wicking open-cell top cover
- · Consistent static-dissipative performance







ANTI-FATIGUE TECHNOLOGY FOOTBED I







TB091621827

ANTI-FATIGUE TECHNOLOGY FOOTBED

XS, S, M, L, XL, XXL

FEATURES

- Anti-Fatigue Technology utilizes a unique inverted cone design for lightweight, resilient support, superior shock absorption and energy return
- OrthoLite" top layer provides premium comfort and moisture management
- · Anatomically contoured footbed cradles the foot to provide maximum comfort and support
- The dynamic arch design adapts to all foot shapes for maximum support and comfort









INSITE FOOTBED







TB0A1Q82001

ANTI-FATIGUE TECHNOLOGY FOOTBED POWERED BY FCX TECHNOLOGY

XS, S, M, L, XL, XXL

FEATURES

- Anti-Fatigue Technology provides support, absorbs shock and returns energy back to the foot
- Contoured FCX Technology™ arch support promotes injury prevention and fatigue reduction
- · OrthoLite top layer provides cushioning, comfort and moisture manangement
- · Mesh lining with Agion® antimicrobial treatment for odor control and comfortable feet












SIZING LABEL STANDARDS

SIZE	xs	s	М	L	XL	XXL
US WOMEN'S	5/6	7/8	9/10	11/12		
US MEN'S		6/7	8/9	10/11	12/13	14/15
UK	2/4	5/6	7/8	9/10	11/12	13/14
EU	35/37	38/39	40/42	43/45	46/47	48/49



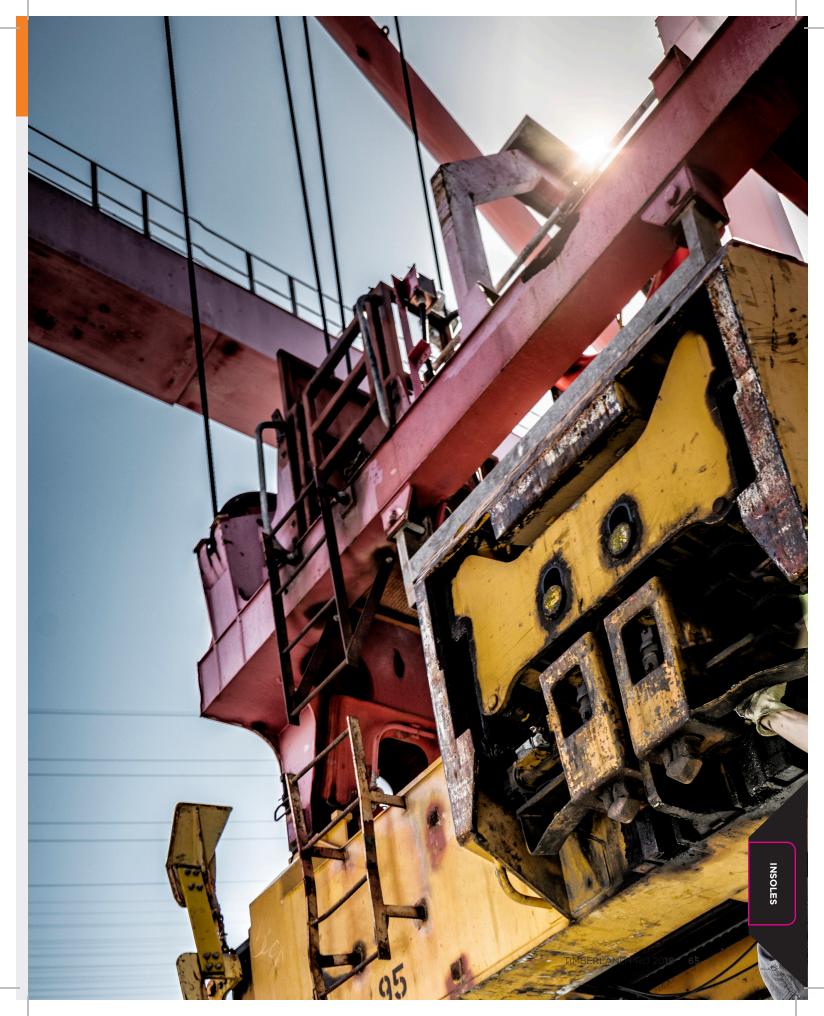

TECHNOLOGY KEY I



Allov Safety Toe

Safety footwear constructed with a metallic safety toe that provides minimum clearance requirements at an impact energy of 200 J ±4 J and compression load of 15 kN ±0.1 kN, as defined in EN ISO 20345 5.3.2.



Composite Safety Toe

Safety footwear constructed with a compression molded non-metallic safety toe that provides minimum clearance requirements at an impact energy of 200 J ±4 J and compression load of 15 kN ±0.1 kN, as defined in EN ISO 20345 5.3.2.



Steel Safety Toe

Safety footwear constructed with a metallic safety toe that provides minimum clearance requirements at an impact energy of 200 J ±4 J and compression load of 15 kN ±0.1 kN, as defined in EN ISO 20345



Puncture Resistant (Non-Metallic Plate)

Safety footwear constructed with a non-metallic component placed in the sole to provide protection against penetration, as defined in EN ISO 20345 6.2.1.



Puncture Resistant (Metallic Plate)

Safety footwear constructed with a metallic component placed in the sole to provide protection against penetration, as defined in EN ISO 20345 6.2.1.



Water Resistant

Delivers maximum waterproof protection and blood-borne pathogen resistance. Meets ASTM F1671-07 safety standard.



Safety footwear constructed with protective features such as antistatic resistance that lies above 100 k Ω and is less than or equal to 1000 M Ω , as defined in EN ISO 20345 6.2.2.2.



Heel Energy AbsorptionSafety footwear constructed to allow for energy absorption of the seat region of minimum 20 J, as defined in EN ISO 20345 6.2.4.



TPU Outsole

Lighter weight and more abrasion resistant than polyurethane, providing exceptional cushioning, plus slip, oil and abrasion resistance



PU Outsole

Lightweight and rugged, providing cushioning plus slip, oil and abrasion resistance.



Rubber Outsole

Heat-resistant, durable rubber compound offers slip, oil and abrasion resistance.



All-Weather TPU Outsole

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



Cold Weather TPU Outsole

Provides enhanced traction on icy surfaces, longer flexibility in cold temperatures, and slip, oil, and abrasion resistance.



Resistance to Hot Contract

Solid Timberland PRO® rubber compound outsole resists hot contact using EN ISO 20344:2004 8.7 testing standard at 572°F to 1000°F. (300°C to 537°C)



Insulated

Thermolite*, lightweight, non-quilted, quick-drying, moisture-resistant insulation helps keep feet warm in



Independent Suspension Network™

Multi-density outsole with comfort lugs that act independently of each other and adapt to varying worksite conditions, providing an additional layer of cushioning, comfort and stability.



Metal-Detector Friendly

All materials and components should not activate most security systems.



Antimicrobial Odor Control

Treatment to help prevent and control odors.



Anti-Fatigue TechnologyA comfort system designed with shock-absorbing, geometrical technology that returns energy back to the foot to deliver all-day support and comfort.



Powerfit™ Comfort System

A comfort system that uses ergonomically designed elements to supply movement and provide critical support for long-lasting comfort.



Timberland PRO® 24/7 Comfort System

A comfort system that helps reduce foot fatigue, supports the arch and cushions every step.



Defender Repellent Systems* treatment featuring

Scotchgard Protector by 3M

Engineered specifically to address the dynamic environmental conditions work footwear may be subjected to by using powerful triple-action C4 chemistry to repel spills, block stains, and help maintain breathability.



TECHNOLOGY KEY I



Made for Women

Designed specifically for women, Timberland PRO women's footwear is built with 3 distinctive points of comfort, including a more anatomical last, asymmetrical toe shape, and a low profile, resulting in a more feminine aesthetic.



Polishable

Surface can be polished and easily wiped clean for a professional look.



CarbonShield[™] Technology

Engineered with nanotechnology, adds strength and unmatched protection, provides a better fit, and reduces weight.



Stable Stride™

Designed to provide lateral stability on slanted and uneven surfaces to help reduce ankle rolling, slippage and injury.



Metal Free

Built with materials that should not activate most security systems or scratch surfaces.



Mutilation Free

Nylon, plastic or hidden eyelets reduce the chances of marking or scratching surfaces.



Blood-Borne Pathogen Resistant

Breathable membrane helps protect from diseases caused by bloodborne pathogens. Meets ASTM F1671-07 safety standard.

TECHNOLOGY KEY INDUSTRY PARTNERS



Outsoles built to withstand the harshest working environments.



Canadian Safety AssociationMeets CAN/CSA-Z195-14 safety standards to provide protection from open circuits and underfoot puncture wounds.



CSA Omega Rectangle

Meets CAN/CSA-Z195-14 safety standards for footwear incorporating electric shock-resistant soles.



Timberland PRO® Raptek

raptek's non-solvent microfiber upper—with excellent wicking and fast drying properties-keeps feet comfortable and dry in wet conditions. Raptek has superior feel and improved cracking compared to natural leather.



CSA Blue Patch/SD

Meets CAN/CSA-2195-14 safety standards for toe protection and SD+ when tested in accordance with ASTM F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.



CSA Blue Patch/SD+

Meets SD static dissipative CAN/ CSA-Z195-14 safety standards for footwear designed to continuously dissipate electrostatic charges When tested in accordance with ASTM F2412, each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.



CSA SD+

Meets CSA standards for SD+ when tested in accordance with ASTM $\,$ F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms

TECHNOLOGY KEY ENISO



Class I safety footwear constructed with metallic or non-metallic protective safety toe caps designed to give the wearer protection against impact and compression, as defined by EN ISO 20345 Tables 1, 2, and 3.

Safety footwear constructed with all Safety Basic (SB) protective features in addition to a closed seat region, Antistatic (A), Energy Absorption of the Seat Region (E), and Resistance to Fuel Oil (FO) protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and 18.

Safety footwear constructed with all S1 protective features in addition to water penetration and water absorption (WRU) protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and

Safety footwear constructed with all S2 protective features with the addition of metallic and/or non-metallic Penetration Resistance (P) and Cleated Outsole protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and 18.

D

Safety footwear constructed with a component placed in the sole to provide protection against penetration, as defined in EN ISO

Safety footwear constructed to allow for energy absorption of the seat region of minimum 20 J, as defined in EN ISO 20345 6.2.4.

HRO

Safety footwear constructed with an outsole that shall not melt and shall not develop any cracks, as defined in EN ISO 20345 6.4.1.

WRU

Footwear constructed with highly water-resistant upper materials, as defined in EN ISO 20345 6.3.

WR

Footwear constructed to provide water penetration

protection, as defined in EN ISO 20345 6.2.5.

SRA

Safety footwear constructed with slip-resistant properties tested on ceramic tile floor with sodium lauryl sulfate, in accordance with

SRB


Safety footwear constructed with slip-resistant properties tested on steel floor with glycerol, in accordance to EN ISO 20345 5.3.5.3.

SRC

Safety footwear constructed with slip-resistant properties tested on ceramic floor with sodium lauryl sulfate and on steel floor with glycerol, in accordance to EN ISO 20345 5.3.5.4

FACTORY DIRECT CALENDAR I

	EX-FACTORY DATES				
ORDER DEADLINE	BANGLADESH	CHINA/ VIETNAM	DOMINICAN REPUBLIC	IN SOLES CHINA	
7/24/17	12/15/17	11/24/17	12/15/17	11/3/17	
8/21/17	1/19/18	12/29/17	1/19/18	12/8/17	
9/25/17	2/16/18	1/26/18	2/16/18	1/5/18	
10/23/17	3/16/18	2/23/18	3/16/18	2/2/18	
11/20/17	4/20/18	3/30/18	4/20/18	3/9/18	
11/20/17	4/20/18	3/30/18	5/18/17	3/9/18	
12/25/17	5/18/18	4/27/18	5/18/18	4/6/18	
1/22/18	6/15/18	5/25/18	6/15/18	5/4/18	
2/19/18	7/20/18	6/29/18	7/20/18	6/8/18	
3/26/18	8/17/18	7/27/18	8/17/18	7/6/18	
4/23/18	9/14/18	8/24/18	9/14/18	8/3/18	
5/21/18	10/19/18	9/28/18	10/19/18	9/7/18	
6/25/18	11/16/18	10/26/18	11/16/18	10/5/18	
7/23/18	12/14/18	11/23/18	12/14/18	11/2/18	
8/20/18	1/18/19	12/28/18	1/18/19	12/7/18	
9/24/18	2/15/19	1/25/19	2/15/19	1/4/19	
10/22/18	3/15/19	2/22/19	3/15/19	2/1/19	

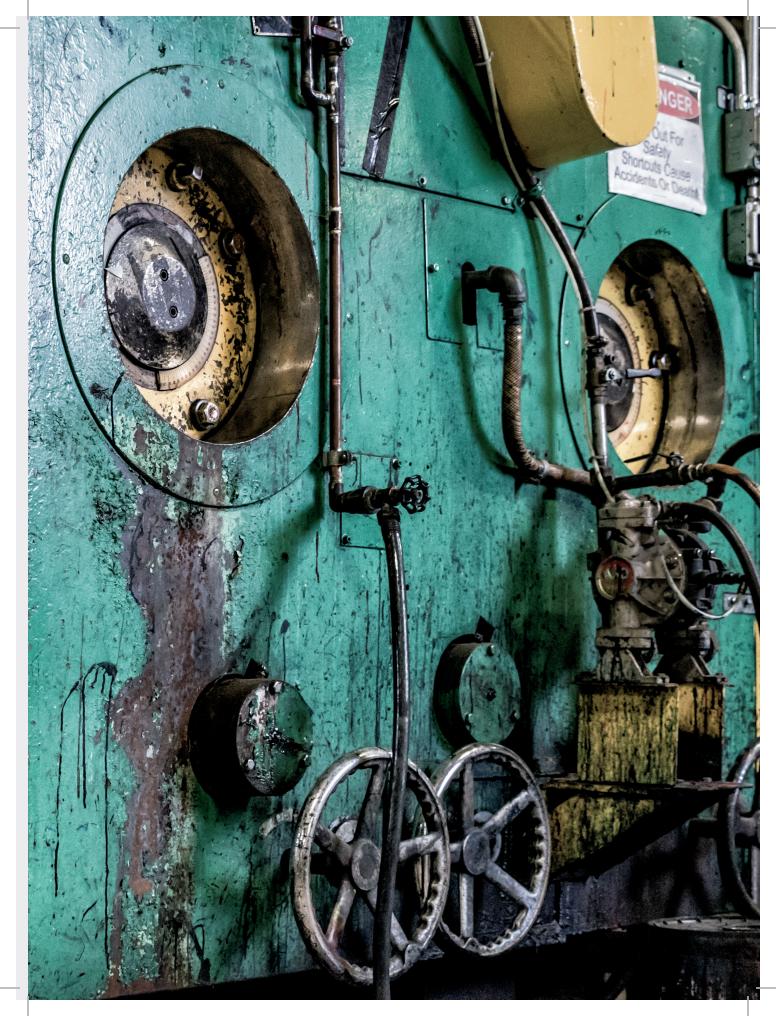

SIZING CHART

MEN

US UK EU CM 3 2 34.5 21,5 3.5 2.5 35 22,0 4 3 36 22,5 4.5 3.5 36.5 23 5 4 37 23,5 5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0 8.5 7.5 41.5 26,5	
3.5 2.5 4 3 4.5 3.5 5 4 4.5 37 23,5 5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
4 3 36 22,5 4.5 3.5 36.5 23 5 4 37 23,5 5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
4.5 3.5 36.5 23 5 4 37 23,5 5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
5 4 37 23,5 5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
5.5 4.5 37.5 24,0 6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
6 5 38 24,0 6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
6.5 5.5 38.5 25,0 7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
7 6 39 25,0 7.5 6.5 40 26,0 8 7 41 26,0	
7.5 6.5 40 26,0 8 7 41 26,0	
8 7 41 26,0	
8.5 7.5 41.5 26,5	
9 8 42 27,0	
9.5 8.5 42.5 27,5	
10 9 43 28,0	
10.5 9.5 43.5 28,5	
11 10 44 29,0	
11.5 10.5 45 29,5	
12 11 46 30,0	
12.5 11.5 46.5 30,5	
13 12 47 31,0	
13.5 12.5 47.5 31,5	
14 13 48 32,0	
14.5 13.5 48.5 32,5	
15 14 49 33,0	
15.5 14.5 49.5 33,5	
16 15 50 34,0	
16.5 15.5 50.5 34,5	
17 16 51 35,0	
17.5 16.5 51.5 35,5	
18 17 52 36,0	
18.5 17.5 52.5 36,5	
19 18 53 37,0	
20 19 54 38,0	

US-United States CM-Japan/Mexico EU-Europe UK-United Kingdom

WOMEN

US	UK	EU	СМ
4.5	2	34.5	21,5
5	2.5	35	22,0
5.5	3	36	22,5
6	3.5	36.5	23,0
6.5	4	37	23,5
7	4.5	37.5	24,0
7.5	5	38	24,0
8	5.5	38.5	25,0
8.5	6	39	25,0
9	6.5	40	26,0
9.5	7	41	26,0
10	8	42	27,0
10.5	8.5	42.5	27,5
11	9	43	28,0
11.5	9.5	43.5	28,5
12	10	44	29,0

PAGE INDEX BY SKU NUMBER

TB0 1152A 214	Caprock Alloy Safety Toe	TB0 A1B6J 231	Sawhorse Steel Safety Toe	3
TB0 1162A 001	Valor™ Duty 6" Soft Toe Side-Zip	TB0 A1B6M 214	Sawhorse Steel Safety Toe	3
TB0 1163A 001	Valor™ Duty 6" Soft Toe Waterproof Side-Zip	TB0 A1B6R 001	Sawhorse Steel Safety Toe	3
TB0 1164A0 01	Valor™ Duty 6" Soft Toe Waterproof	TB0 A1FY5 214	Valor™ Duty Oxford Soft Toe	5
TB0 1165A 001	Valor™ Duty 8" Composite Safety Toe Waterproof	TB0 A1G9I 231	Disruptor Steel Safety Toe	3
	Side-Zip	TB0 A1G9T 214	Disruptor Steel Safety Toe	3
TB0 1167A 001	Valor™ Duty 8" Soft Toe Waterproof Side-Zip56	TB0 A1GBE 001	Workstead Steel Safety Toe	2
TB0 33034 214	Pit Boss 6" Steel Safety Toe32	TB0 A1GBP 214	Workstead Steel Safety Toe	2
TB0 39077 210	Ratchet Steel Safety Toe	TB0 A1GDJ 001	Workstead Steel Safety Toe	2
TB0 40000 001	External Metguard 6" Steel Safety Toe51	TB0 A1GE6 231	Workstead Steel Safety Toe	2
TB0 85590 214	Gladstone Steel Safety Toe ESD	TB0 A1GH1 001	Splitrock XT Steel Safety Toe	1:
TB0 86509 214	Gladstone Steel Safety Toe ESD	TB0 A1GH2 231	Splitrock XT Steel Safety Toe	1:
TB0 86515 214	Mudslinger 5" Steel Safety Toe Waterproof	TB0 A1GHC 214	Splitrock XT Steel Safety Toe	1:
TB0 87520 214	Magnus 6" Steel Safety Toe	TB0 A1GQ4 214	Sawhorse Composite Safety Toe Waterproof	3
TB0 89646 214	Boondock 8" Composite Safety Toe Waterproof Insulated48	TB0 A1GQQ 001	Wildcard Composite Safety Toe	4
TB0 90667 001	Valor™ Tactical Soft Toe Oxford	TB0 A1GSW 001	Wildcard Composite Safety Toe	4
TB0 91621 827	Anti-Fatigue Technology Footbed64	TB0 A1GT9 065	Powertrain Sport Alloy Safety Toe SD+	4
TB0 91631 214	Boondock 6" Composite Safety Toe Waterproof21	TB0 A1GTK 001	Powertrain Sport Alloy Safety Toe SD+	4
TB0 91661 214	Resistor 6" Composite Safety Toe Waterproof26	TB0 A1H2Q 001	Powertrain Steel Safety Toe	4
TB0 92615 214	Boondock 6" Composite Safety Toe Waterproof21	TB0 A1H30 001	Women's Powertrain Steel Safety Toe ESD	6
TB0 92632 214	Women's Rigmaster 6" Alloy Safety Toe Waterproof 61	TB0 A1HJZ 214	Mortar Composite Safety Toe Waterproof	2
TB0 92633 001	Valor™ Tactical 5" Soft Toe Waterproof	TB0 A1HLK 214	Mortar Steel Safety Toe	2
TB0 92634 001	Valor™ Tactical 5" Soft Toe54	TB0 A1KB0 214	Ridgework Composite Safety Toe Waterproof	1
TB0 92638 001	Valor™ Tactical 8" Soft Toe Side-Zip53	TB0 A1KCX 214	Ridgework Composite Safety Toe	1
TB0 92639 001	Valor™ Tactical 8" Soft Toe Waterproof Side-Zip53	TB0 A1KIT 214	Women's Hightower 6" Alloy Safety Toe Waterproof	60
TB0 92669 001	Women's Powertrain Alloy Safety Toe ESD62	TB0 A1KK6 231	Women's Direct Attach Steel Safety Toe	59
TB0 95553 214	Rigmaster 8" Steel Safety Toe Waterproof 47	TB0 A1KKE 001	Women's Direct Attach Steel Safety Toe	59
TB0 A11K5 214	Women's Rigmaster 8" Alloy Safety Toe Waterproof 61	TB0 A1KKH 214	Women's Hightower Steel Safety Toe	60
TB0 A11QF 001	Powertrain Alloy Safety Toe ESD	TB0 A1KKP 001	Women's Hightower Steel Safety Toe	60
TB0 A11T9 214	Caprock 8" Alloy Safety Toe	TB0 A1KKS2 14	Women's Hightower 6" Alloy Safety Toe Waterproof	60
TB0 A11VG 231	Ratchet Steel Safety Toe	TB0 A10RE 827	Anti-Fatigue Technology ESD Footbed	64
TB0 A11WE 214	Branston Alloy Safety Toe Oxford ESD	TB0 A1Q2D 214	Sawhorse Steel Safety Toe	34
TB0 A11WP 001	Branston Alloy Safety Toe Oxford ESD	TB0 A1Q2E 001	Sawhorse Steel Safety Toe	34
TB0 A11X1 214	Branston Alloy Safety Toe Moc Toe Slip-On ESD39	TB0 A1Q2H 231	Sawhorse Steel Safety Toe	34
TB0 A11XC 001	Branston Alloy Safety Toe Moc Toe Slip-On ESD39	TB0 A1Q5Q 001	Hypercharge 6" Composite Safety Toe Waterproof	9
TB0 A132M 231	Traditional Composite Safety Toe	TB0 A1Q6S 214	Endurance HD Composite Safety Toe Waterproof	2
TB0 A133K 236	Welted Composite Safety Toe	TB0 A1Q6V 214	Endurance HD Composite Safety Toe Waterproof	2
TB0 A134T 001	Euro Hiker 2G Steel Safety Toe	TB0 A1Q82 001	Anti-Fatigue Technology Footbed Powered	
	Euro Hiker 2G Steel Safety Toe		by FCX Technology	
TB0 A136P 001	Splitrock Steel Safety Toe14	TB0 A1Q80 214	Keele Ridge Work Steel Safety Toe Waterproof	18
TB0 A1371 214	Splitrock Steel Safety Toe14	TB0 A1Q8V 214	Flume Mid Work Steel Safety Toe Waterproof	18
TB0 A137C 231	Splitrock Steel Safety Toe	TB0 A1RV5 214	Magnus 6" Steel Safety Toe	28
TB0 A137N 236	Eagle Steel Safety Toe30	TB0 A1S22 214	Hypercharge 6" Composite Safety Toe Waterproof	9
TB0 A13AH 001	Splitrock Steel Safety Toe			
TB0 A16J0 484	Wildcard Composite Safety Toe			
TB0 A176A 001	Powertrain Sport Alloy Safety Toe			
TB0 A1B1L 214	Mortar Pull-On Steel Safety Toe			



TIMBERLAND PRO

200 Domain Drive Stratham, NH 03885

CUSTOMER SERVICE:

1-855-253-3261



Importator autorizat ROMANIA

Bd.George Cosbuc nr.350, Galati, Romania Contact: George Namolosu 004.0749.203.585 office350@universalconstruct.ro www.universalconstruct.ro

Timberland, Timberland PRO, the PRO logo, ISN, the ISN logo, Independent Suspension Network, PowerFit, Titan, 24/7 Comfort Suspension, PRO 24/7 Comfort Suspension, the PRO 24/7 Comfort Suspension logo, Valor, Cast-Bond, Ever-Guard, The Anti Fatigue Technology logo, Ladder Lock, CarbonShield, the CarbonShield logo, Stable Stride, and the Stable Stride logo and SafeGrip are trademarks of TBL Licensing LLC. DuPont and Kevlar are trademarks of E.I. du Pont de Nemours and Company. Thermolite is a trademark of Invista North America S.A.R.L. Vibram, Fire&Ice, and the yellow octagonal label are trademarks of Vibram S.p.A. Goodyear (and Winged Foot design) is a trademark of The Goodyear Tire & Rubber Company used under license by Fitday Enterprise Ltd. 3m and Scotchgard are trademarks of 3M. Defender Repellent Systems is a trademark of Prime Leather Finishes Co. OrthoLite is a trademark of O2 Partners LLC. BASF is a trademark of BASF SE. Opti is a trademark of J&P Coats Limited. Agion is a trademark of Agion Technologies, LLC. © 2018 TBL Licensing LLC. FCX Technology is a trademark of FCX Global Inc. All rights reserved. PRO1064